


Study Material

On

Engineering. Material

**Department of Mechanical
Engineering**

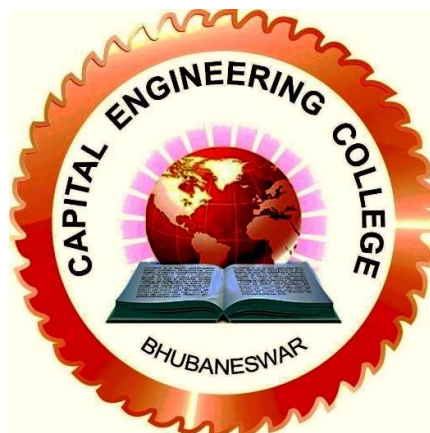

CAPITAL ENGINEERING COLLEGE

Mahatapalla, Khordha, Bhubaneswar, Odisha: 752060

(Affiliated to Biju Patnaik University of Technology, Odisha and SCTE & VT,
Odisha, Approved by AICTE, New Delhi and Recognised by Govt. of Odisha)

Engineering materials.

* Engineering materials and their properties.

→ Introduction -

- material science and engineering plays a vital role in this modern age of science and technology. Various kinds of materials are used in industry, housing, agriculture, transportation.

- The knowledge of materials and their properties of a great importance for a design engineer.

→ A design engineer must be familiar with the effects which the m/fing process and heat treatment have on the properties of the materials.

→ Engineering materials are classified 2 types.

(i) - metals and their alloys (iron, steel, AL, copper)


(ii) - non-metals (glass, rubber, plastic etc)

→ metals classified 2 types.

1 - Ferrous metals -

~~ferrous~~

2 - Non-ferrous metals -

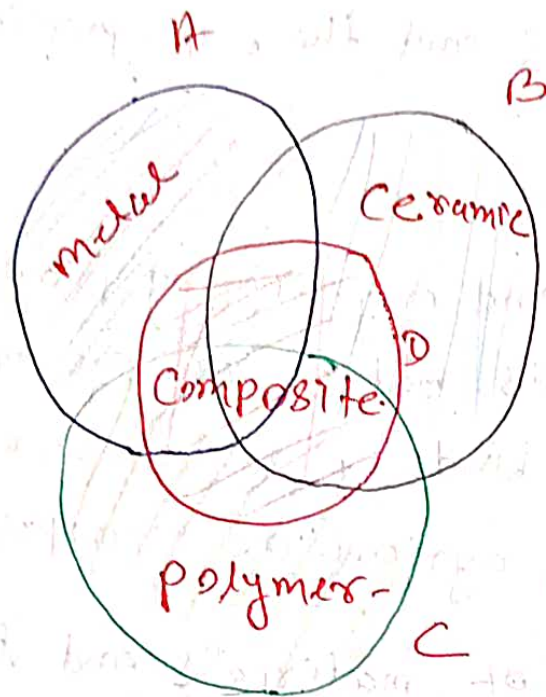

A - metal

B - Ceramic

C - Polymer

D - Composite.

→ Ferrous metals -

The ferrous metals are those which have the iron as their main constituent, such as cast iron,

→ Non ferrous metals -

The non ferrous metals are those which have metal other than iron as their main constituent, such as, AL, brass, tin, zinc.

* Physical properties -

→ The physical properties are employed to describe the response of a material to imposed stimuli under conditions in which external forces are not concerned.

* Physical properties

a - Dimensions

b - Appearance

c - colour.

d - density

e - melting point

F - Porosity

g - structure.

→ a - Dimensions -

Dimensions of a material its size (length, breadth, width, diameter) and shape (square, circular, angle section etc.)

→ Appearance -

- Metals themselves have got different appearance like aluminium is a silvery white metal where as copper brownish red.
- Appearance include, colour, finish of a metals

→ colour -

- The colour of a material is very helpful in identification of a metal, The colour of a metal depends upon the wavelength of the light that the material can absorb.

→ Density -

It is the weight of unit volume of a material expressed in metric units.

$$\rho = m/v$$

ρ - Density -

m - total mass

v - volume

→ melting point -

at the temp the solid metals change into molten state (liquid state)

→ Porosity -

- A metal is said to be porous if it has pores within it.
- Pores can absorb lubricant as in a sintered self lubricating bearing.
- It is the ratio pore volume to bulk volume.

→ Structure -

- It means geometric relationships of material components.
- the arrangement of internal components of matter (crystal structure, micro structure)

* CHEMICAL PROPERTIES

→ most of engineering materials when they come in contact with other substance with they can react, tend to suffer from chemical deterioration.

- Corrosion Resistance
- chemical composition.
- acidity or alkalinity.



Corrosion -

- It is the deterioration of a material by chemical reaction with its environment.
- It Reduces the material properties and economic value of the product.
- It attacks metals as well as non-metals

* Performance Requirement

- The material of which a part is composed must be capable of embodying or performing a part's function without failure.

exp - a component part to be used in a furnace must be of that material which can withstand high temp.

- While it is not always possible to assign quantitative values to these functional requirements, they must be related as precisely as possible to specified values of most closely applicable mechanical, physical, electrical or thermal properties.

Materials Reliability

- Reliability is the degree of probability that the material of which it is made will remain stable enough to function ~~pos~~ in service for the intended life of the product with out failure.
- A material if it corrodes under certain conditions, then it is neither stable nor reliable for those conditions.

Safety -

A material must safely perform its function, otherwise, the failure of the product made out of it may be catastrophic in air-planes and high pressure system.

- An another example, materials that gives off spark when struck are safety ~~hazards~~ hazards in a coal mine.

Chapter - 2.0 -

Ferrous materials and alloys

* Characteristics of Ferrous materials -


- The materials contain the iron as a base metal
- good conductors of heat and electricity
- metal alloys have high Resistance to shear torque and deformation.
- The thermal conductivity of metals is useful for containers to heat material over a flame.

→ Application

- Due to the strength and Resilience of metals, used in high-rise, building and bridge construction, tools, pipes, Rail tracks
- Corrosion Resistance property makes them useful in food processing plant eg. steel.
- Cast iron is strong but brittle, and its compressive strength is very high. So it is used to castings, engine body, machine base
- mild steel is soft, ductile and high strength so it is used to structural, workshop, household furniture etc.

- Carbon steels are used for cutting tool due to their hardness, strength and corrosion Resistance properties.

Classification -

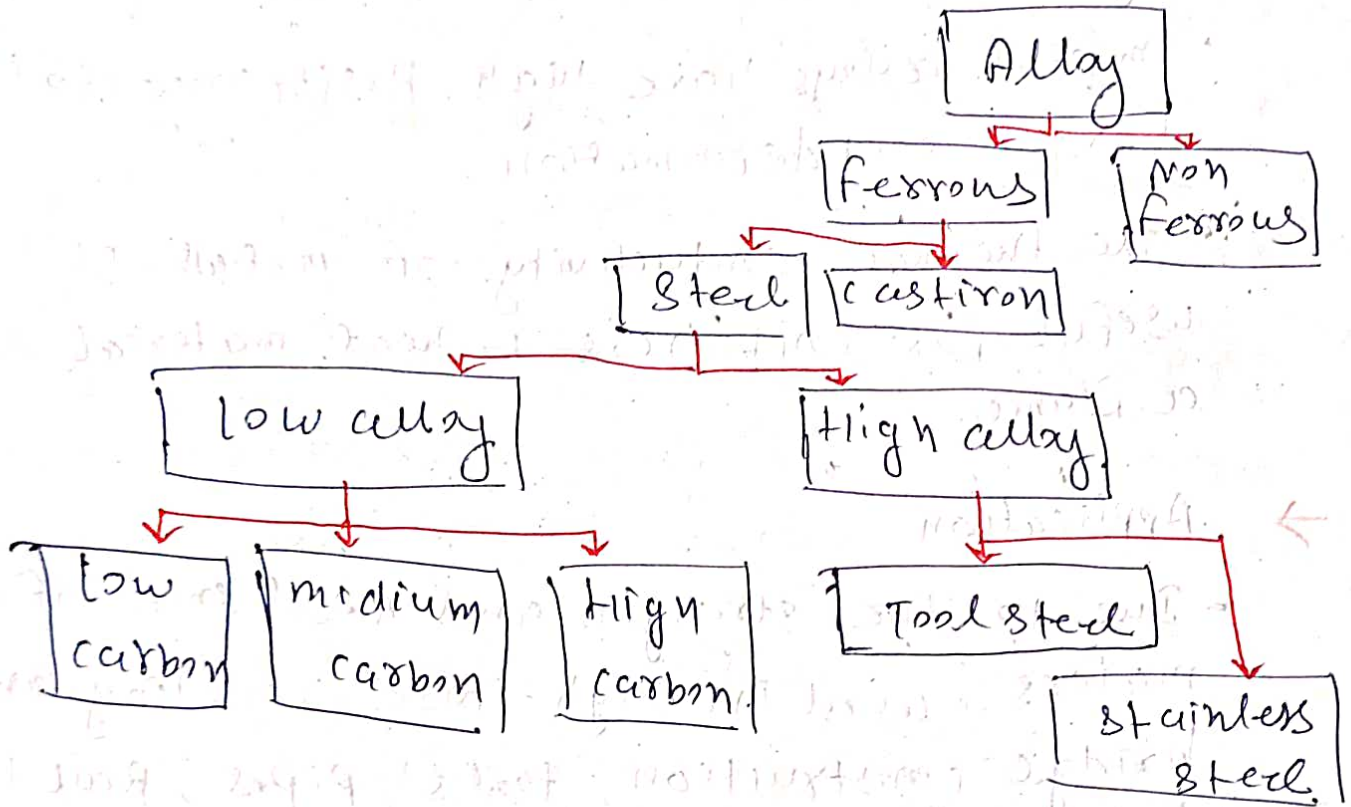

→ Steel - it is an alloy of Iron and carbon in which carbon content is up to 2%.
0.8 - 2.1%

→ Cast iron - in cast iron carbon content is 2% to 6.67%.

Type of cast iron - white, malleable gray, compacted graphite.

→ Low carbon steel -

- Carbon content in the Range of 0.0 to 0.3%
- It has good weldability and machinability.
- Cold working needs to improve the strength.

→ medium carbon steel -

- Carbon content is the Range of 0.3 - 0.8%.
- It can be treated - austenitizing, quenching and then tempering.
- metal we get tempered martensite.
- Low hardenability.
- Addition of Cr, Ni, Mo improve the heat treating capacity.
- Application - Railway wheels and tracks, gears, crankshafts.

→ High carbon steel - Carbon content 0.8 - 2%.

- High hardness and strength (High 'C' content)
- Hardest and least ductile.
- - used in hardened and tempered condition.
- Add Cr, V, W bec strong carbide forms
- used to tool and die, bec high hardness and wear resistance property.

→ Tool steel -

- Their suitability comes from their distinctive hardness, Resistance to abrasion, their ability to hold a cutting edge, and their Resistance to deformation at elevated temp.
- It is generally used in a heat treated state.
- many high carbon & tool steels are also more resistant to corrosion due to higher ratios of elements such as vanadium.
- Carbon content both 0.7% and 1.5%.

→ Stainless steel -

It is an alloy of Iron with a minimum of 10.5% Chromium. Chromium produces a thin layer of oxide on the surface of the steel.

- Stainless steel also contains ^{varying} ~~very~~ amount of carbon, silicon, manganese, Nickel and molybdenum.

- Nickel and molybdenum may be added to impart the enhanced formability and increase corrosion Resistance.



plain carbon steel -

It is an alloy of iron and carbon with content up to 1.5%. although other elements such as silicon, manganese may be present.



carbon steel, classified

- low carbon steel
- medium carbon steel
- high carbon steel.



Low carbon steel -

- Dead mild steel (0.05 to 0.15% of C)

It used for making steel wire, sheet, screws, pipe, nail, chain etc.

- mild steel containing 0.15 to 0.2% carbon
It is used for making camshafts, sheets, strips, fly blades, welded tubing, forging, drag line.

- mild steel containing 0.2 to 0.3% carbon
used to making valves, gears, crank shafts, connecting rods, railways axles etc.

→ Medium carbon steel

Steel containing 0.3 to 0.7% 'C'.

- Steel containing 0.35 to 0.45% 'C' is used for connecting Rod, wires & Rod, Spring clips, gear shaft, key stock, Shafts and brakes lever, etc.
- Steel containing 0.45 to 0.55% 'C' is used for Railways coach axles, axles and crank pins on heavy machine, crank shaft.
- Steel containing 0.6 to 0.7% carbon used to drop forging die and die blocks, clutch discs, plate punches, set screws, thrust washers.

→ High carbon steel

* Steel containing 0.7 to 0.15% 'C'.

- Carbon containing 0.7 to 0.8% used for cold chisels, jaws for vice, wheels for Railway & service. wire for structural work ~~on~~ automatic clutch disc. hacksaw.

- Carbon 0.8% - 0.9% ^{used for} Railway rail, machine chisels, Pinches & dies, music wires.
- Carbon 0.9 to 1.0% used to leaf & coil Springs, keys, speed discs, pins.
- Carbon 1.0 to 1.3% used for making Files, thread metal dies, twist drills, machine tools, metal cutting tools,
- Steel containing 1.3 to 1.5% carbon is used to making drawing dies, metal cutting saws, Paper knives, tool for turning process.

* Alloy Steel -

Steel is considered to be alloy steel when the maximum of the range given for the content of alloying element exceeds one or more of the following things.

Mn - 1.65%, Si - 0.6%, Cu - 0.6%.

Al, B, Cr up to 3.0%.

Cu, Mo, Ni, Ti, W, V element added to obtain a desired alloying effect.

→ Low and medium alloy steel.

~~Low~~ - In low and medium alloy steel alloying element is not exceeding 10%.

① - 1st Symbol : 100 times the average % of carbon.

2 - 2nd, 4th, 6th etc Symbols : Elements.

3 - 3rd, 5th, 7th etc. Symbols : % of element multiplied by Factor as follows.

Element

Multiplying Factors.

C, Co, Ni, Mn, Si & W

Al, Be, V, Pb, Cu, Nb, Ti

P, S, N

10

100

W - last element : + indicates special characteristics.

→ High alloy steel -

total alloying element is more than 10%.

For example - X10Cr, 18Ni9S3

(X high alloy steel), (10% - 0.1% C) (Cr 18 = 18% Cr)
(Ni 9 = 9% Ni) S3 - pickled condition.

* TOOL STEEL

Tool steel may be defined as special steel which are used to form, cut or otherwise change the shape of a material into finished properties of tool steel.

- 1 - Good toughness.
- 2 - Good wear Resistance.
- 3 - Good machinability.
- 4 - Slight change of form during hardening.
- 5 - Resistance to decarburization.
- 6 - Resistance to softening on heating.

* Stainless Steel

When 11.5% or more chromium is added to iron a fine film of chromium oxide forms spontaneously on the surface. The film ~~act as~~ act as a barrier to retard further oxidation, rust or corrosion.

• The stainless steel basing on their micro-structure can be grouped into three metallurgical classes such as

- 1 Austenitic stainless steel
- 2 - Ferritic stainless steel

Application -

- Aircraft industry (engine parts)
- Heat exchangers in chemical industry.
- Trailers and Railways cars
- Household items

* Effect of alloying elements -

→ Chromium - it joins with carbon to form Chromium carbide, thus adds to depth hardenability with improved resistance to abrasion & wear.

→ manganese -

- It contributes markedly to strength and hardness
- It counteracts brittleness from sulphur.
- Lowers both ductility & weldability if it is present in high percentage with high carbon content in steel.

→ Nickel -

- It increases toughness and resistance to impact

- lessens distortion in quenching.

- Strengthens steels.

- Renders high-chromium iron alloys austenite

- does not unite with carbon.

→ vanadium

- It promotes fine grains in steel

- increases hardenability.

- imparts strength & toughness to heat-treated steel.

- causes ~~mark~~ marked secondary hardening.

→ molybdenum

- promotes hardenability of steel, makes fine grain

- makes steel unusually tough at various hardness steel

- Raises tensile and creep strength at high temp.

- Corrosion resistance,

→ Tungsten -

- It increase hardness,

- Promotes fine grains.

- Resists heat.

- Promotes strength at elevated temp.

IRON - CARBON - SYSTEM

A phase in a material is defined as a region of spatially uniform macroscopic physical properties like density, atomic arrangement, crystal chemical composition etc.


Example -

Iron in BCC structure, FCC structure, in liquid form and in gaseous state are different phases of iron.


In one component materials a phase is stable over a range of temp. and pressure.

A. homogeneous solution of two or more components that may exist over a range of composition, temp. and pressure is considered as the same phase.

Equilibrium phase diagrams are normally used to show the stability of phases in a material as function of temp, pressure and composition.



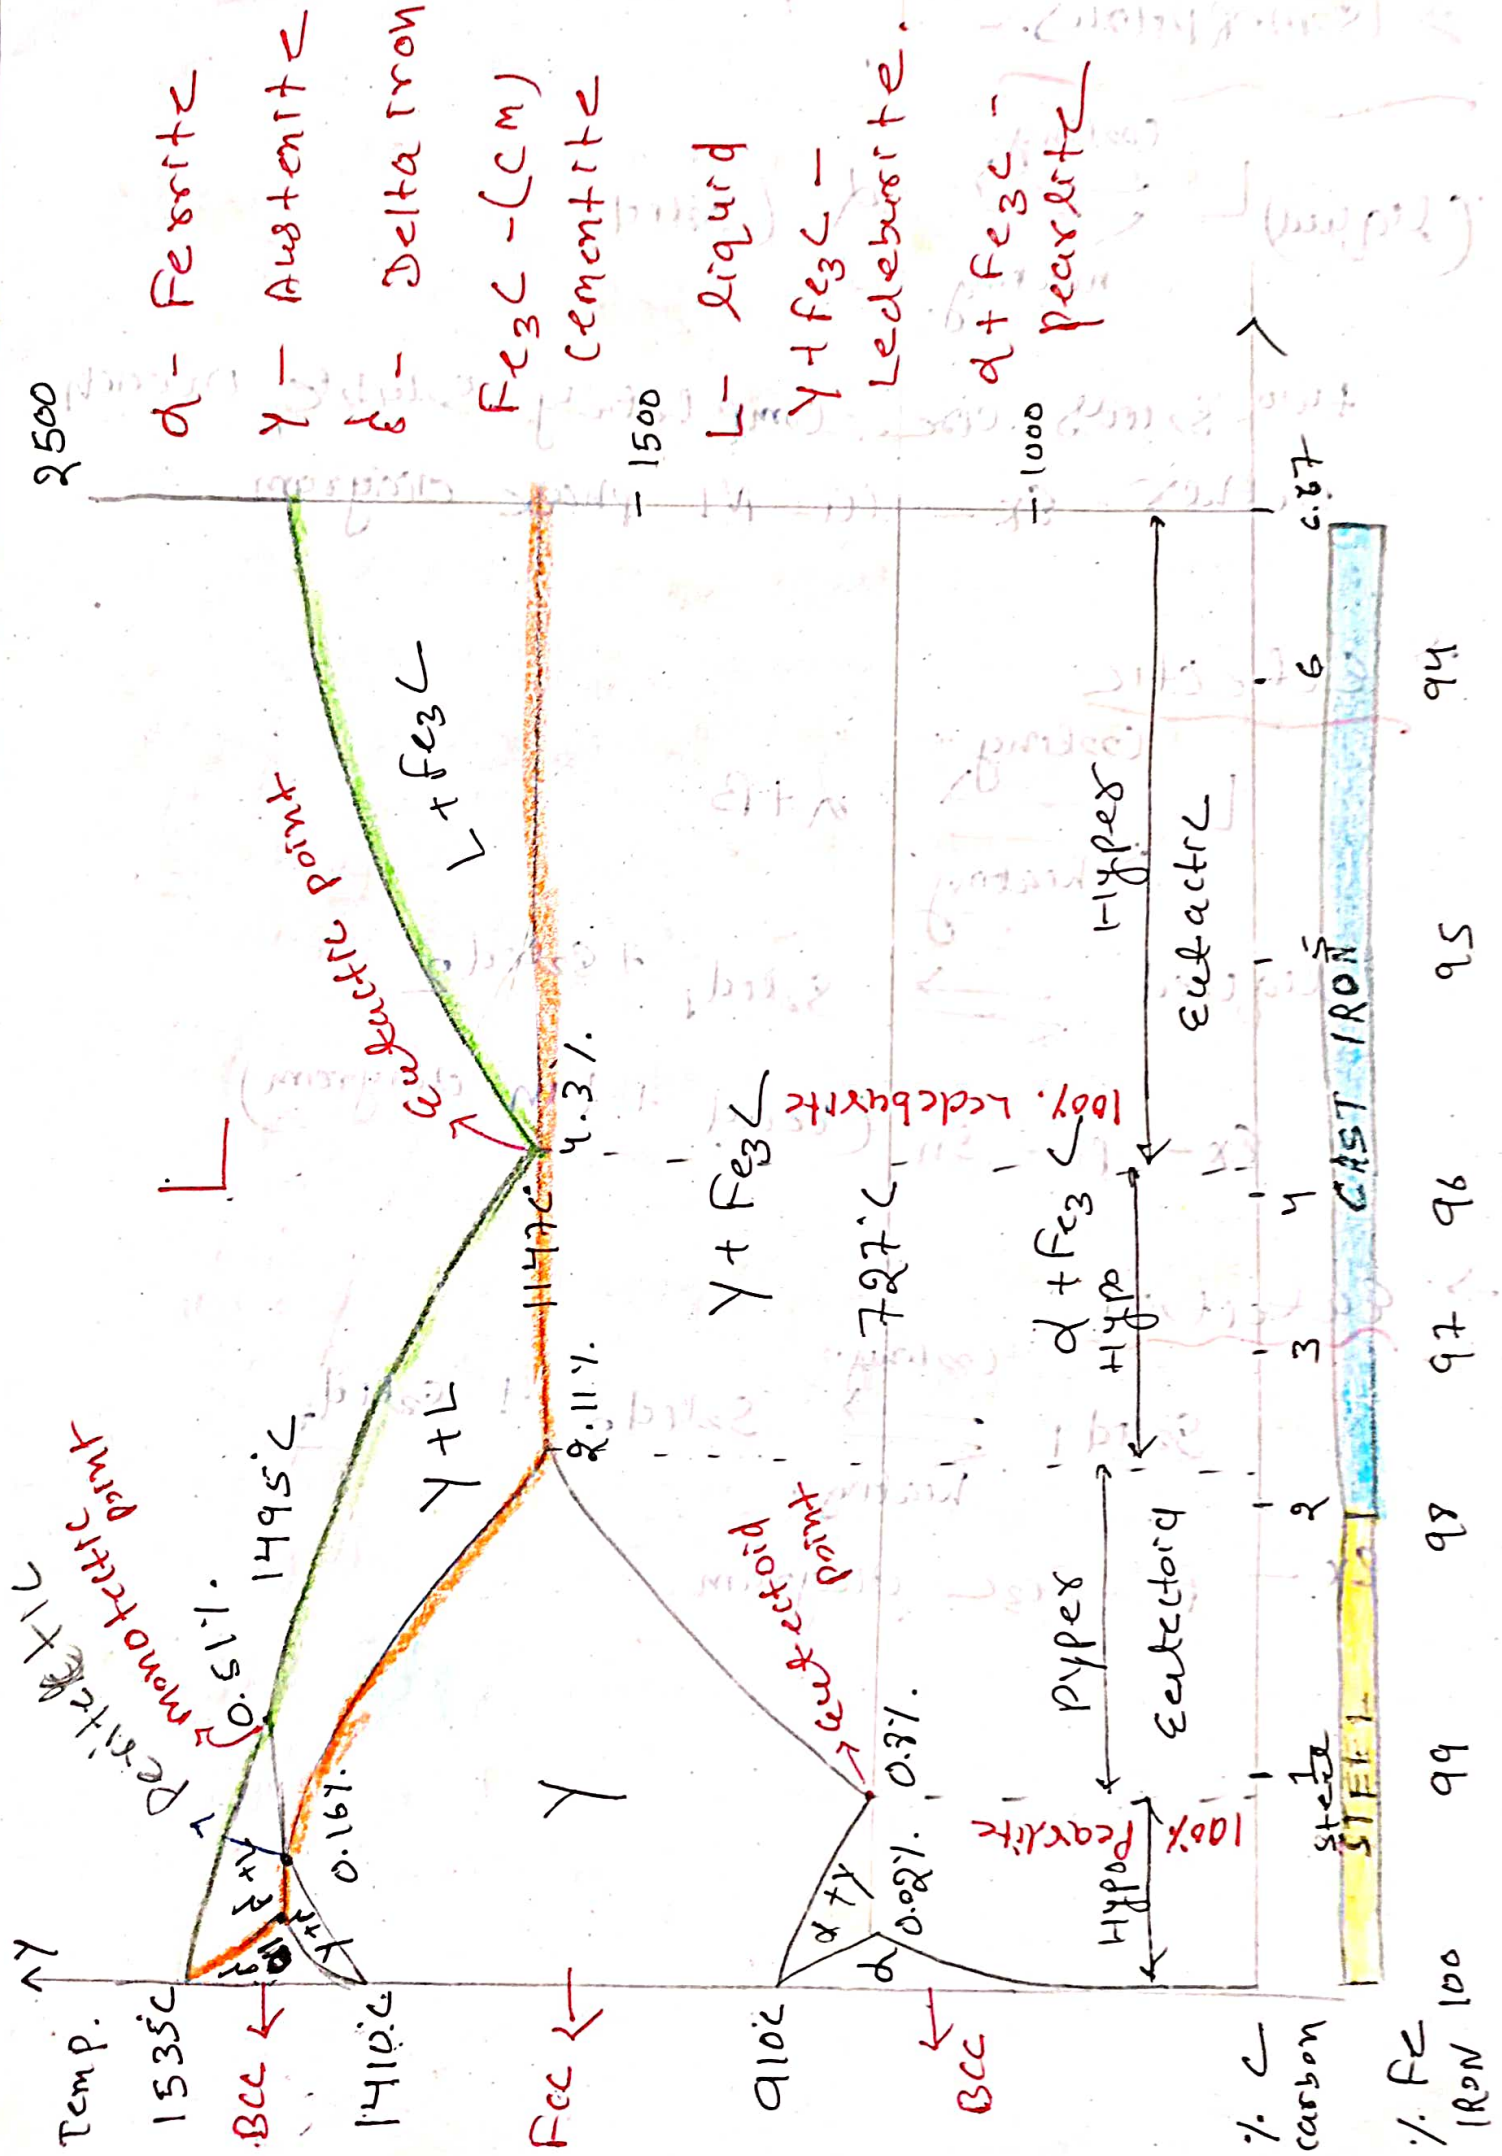


→ Isomorphous -

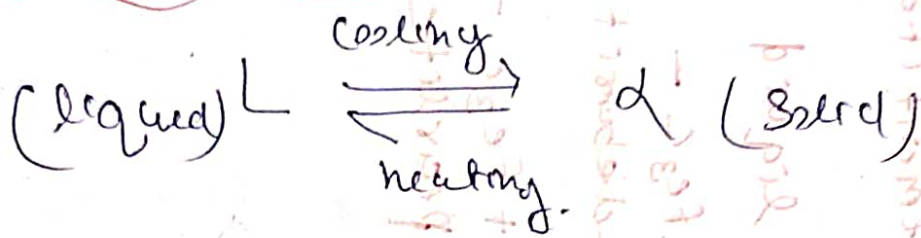


two solids are completely soluble in each other. Ex - Cu-Ni phase diagram.

→ Eutectic

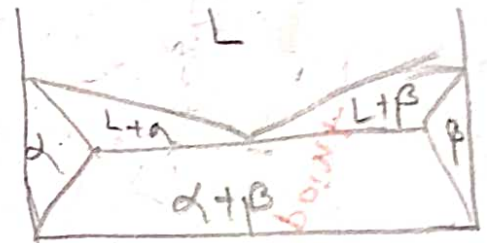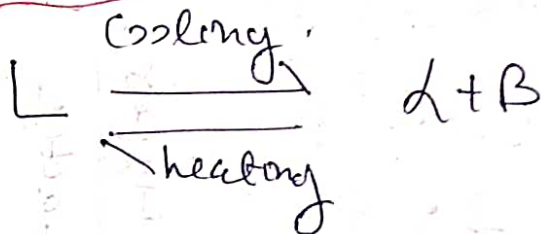


Ex - Pb-Sn (Lead + tin diagram)

→ Eutectoid

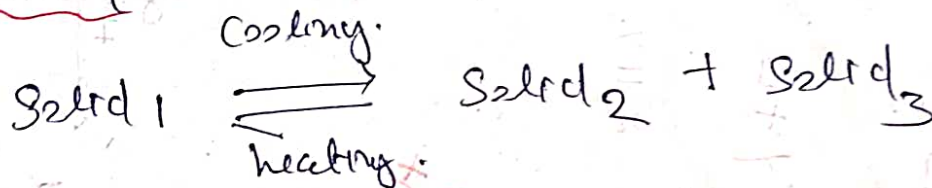

Ex - Fe-Fe₃C diagram.

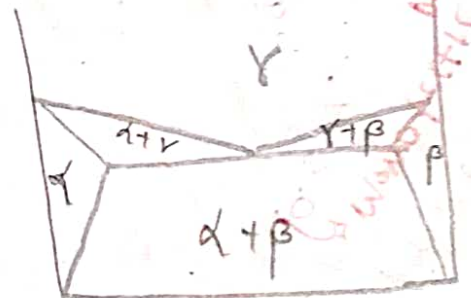


→ peritectic peritectic

Liquid + Solid 1 $\xrightleftharpoons[\text{heating}]{\text{cooling}}$ Solid 2

Fe - Fe₃C diagram

L + δ $\xrightleftharpoons[\text{heating}]{\text{cooling}}$ γ

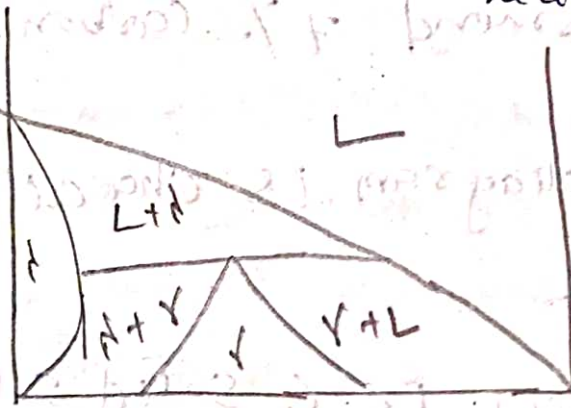

monotectic phases:

L₁ $\xrightleftharpoons[\text{Heating}]{\text{cooling}}$ L₂ + α

Liquid \rightleftharpoons liquid₂ + solid

mixture of Pb & Cu \rightleftharpoons Lead + Copper

Fe-C binary system - phase transformation

In their simplest form, steels are alloys of iron (Fe) and carbon (C). The Fe-C phase diagram is fairly complex one but we will only consider the steel part of the diagram up to around 7% carbon.


* Fe-Fe₃C phase diagram is characterized by five phases -

- ① δ - Ferrite (BCC) Fe-C solid solution.
- ② γ - austenite (FCC) Fe-C solid solution.
- ③ α - Ferrite (BCC) Fe-C solid solution.
- ④ Fe₃C (iron carbide) or cementite - an inter-metallic compound and liquid and Fe-C solution and four invariant reactions:


→ Peritectic Reaction - at 1495°C at 16% C
 δ - Ferrite + L \leftrightarrow γ - iron (austenite)

→ monotectic Reaction - at 1495°C at 0.51% C, L \leftrightarrow L + γ - iron (austenite)

→ eutectic reaction at 1147°C and $4.3\% \text{C}$

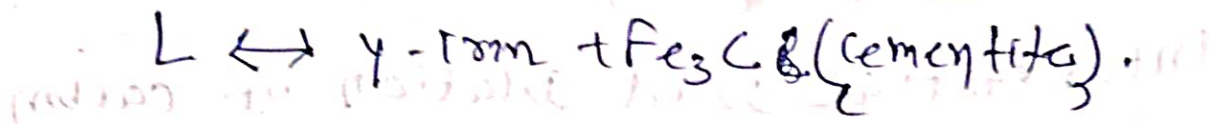

→ eutectoid Reaction 723°C and $0.8\% \text{C}$

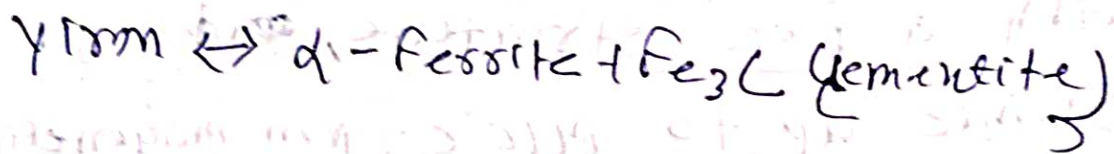

Cementite - iron carbide: chemical formula

Fe_3C , contains $6.67\% \text{wt C}$. It is a

typical hard and brittle interstitial

compound of low tensile but high compressive strength. Its crystal structure is orthorhombic

metastable phase - at 710°C slowly decomposes to αiron and carbon.

$\delta\text{-iron}$ exists between 1410°C and 1535°C

It may exist in combination with the

melt to $\sim 0.51\% \text{wt C}$ with austenite

to $0.16\% \text{wt C}$ and in a single phase

state to $0.10\% \text{C}$. δiron has the

BCC crystal structure and is

magnetic.

Austenite γ (^{gamma} ~~gamma~~) - iron:

Interstitial solid solution of carbon
(up to 2.11 wt %) dissolved in iron
with a FCC structure, ~~and~~
stable up to 1410°C: non magnetic phase.

Ferrite (α) - iron - which is an interstitial
solid solution of a small amount (up to
0.022 wt %) of carbon dissolved in iron
with BCC crystal structure,
~~do~~ possesses polymorphic transformation
to γ -iron at 910°C. It is the
softest structure on the iron-iron
carbide diagram, magnetic below
727°C.

CRYSTAL SYSTEM

Crystallography - It is the branch of science that deals with the study of internal structure of crystals and its properties.

CRYSTAL - It is a solid consisting of atoms and ions ~~array~~ arranged in a systematic or regular pattern in 3D space geometrically.

Crystal structure -


Regular 3 dimensional pattern of ions in phase.

Phase lattice - 3 dimensional array of point each of which has identical surroundings.

Unit cell - A convenient repeating unit of a space lattice is known as unit cell.

→ Smallest group of atoms that possess the symmetry of the crystal.

→ The specific unit cell for each metal is defined by its parameters. which are ~~defined by its~~ the edges of the unit cell a, b, c and the angles α (between b & c), β (between a & c) & γ (between a & b)

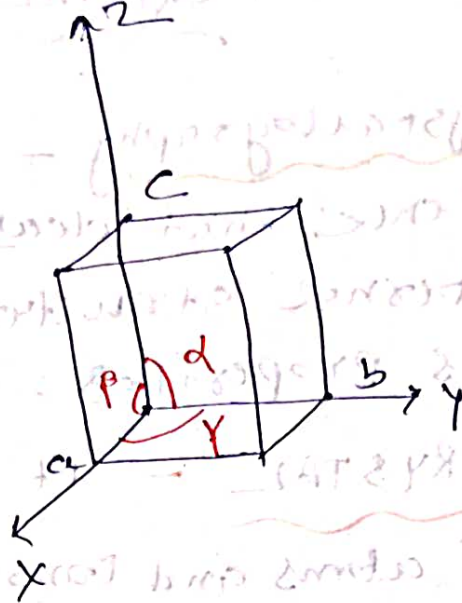


The crystal structure -

(I) - Cubic simple.

$$a = b = c$$


$$\alpha = \beta = \gamma = 90^\circ$$

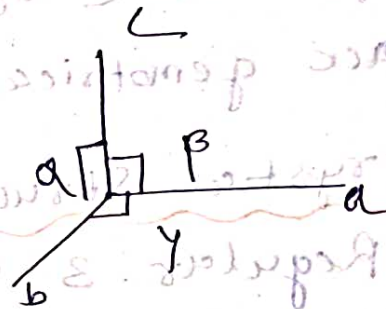

(II) - simple

(III) - Body centred.


(IV) - Face centred.

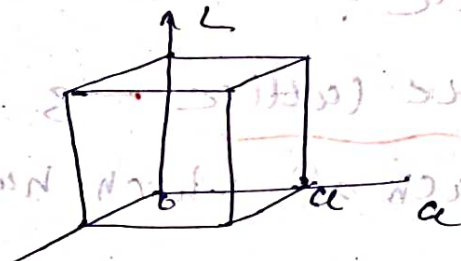

(V) - Tetragonal -


$$a = b \neq c$$

$$\alpha = \beta = \gamma = 90^\circ$$

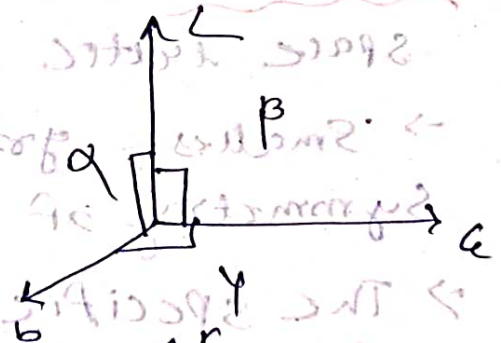

(VI) - simple

(VII) - Body centred.

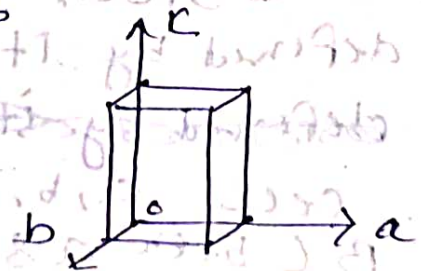

(iii) ORTHORHOMBIC



$$a \neq b \neq c$$

$$\alpha = \beta = \gamma = 90^\circ$$

i) simple

ii) - end centred

iii) - Body centred.

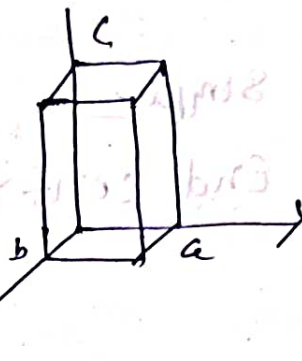
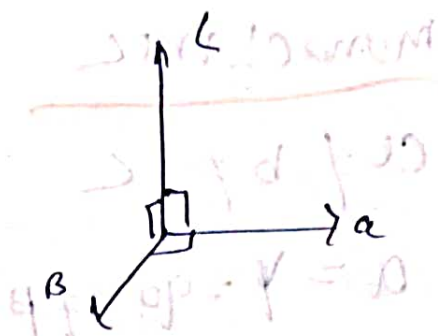


(iv) Rhombohedral.

$$a = b = c$$

$$\alpha = \beta = \gamma \neq 90^\circ$$

i) simple

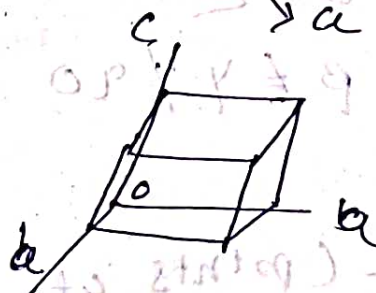



(v) Hexagonal.

$$a = b \neq c$$

$$\alpha = \beta = 90^\circ, \gamma = 120^\circ$$

i) simple.

ii) point at the ~~twelve~~ twelve corners of the hexagonal prism and at the centres of the two hexagonal faces.

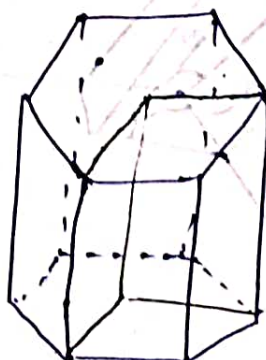
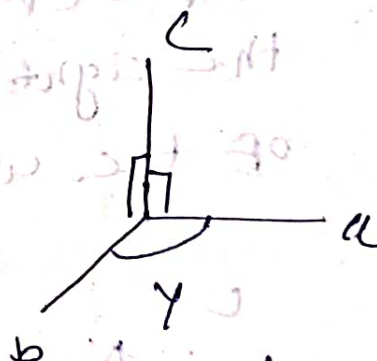


MONOCLINIC

$$a \neq b \neq c$$

$$\alpha = \gamma = 90^\circ \neq \beta$$

- (i) simple
- (ii) End centred.



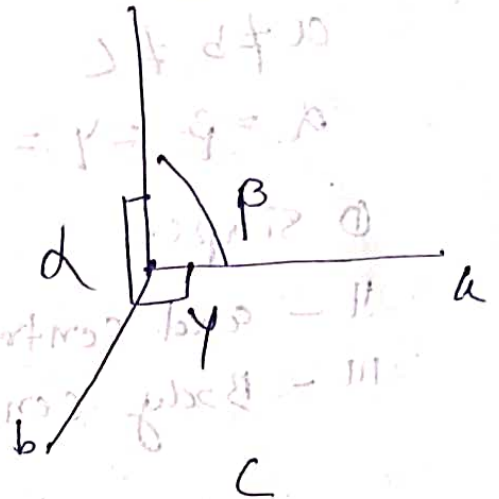


TETRAGONAL

$$a \neq b \neq c$$

$$\alpha \neq \beta \neq \gamma \neq 90^\circ$$

Simple (points at the eight corners of the unit cell)

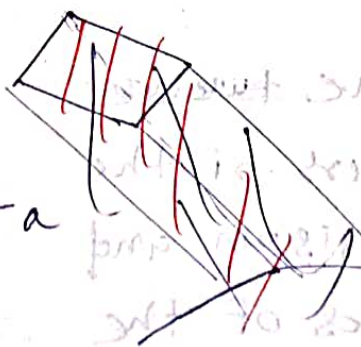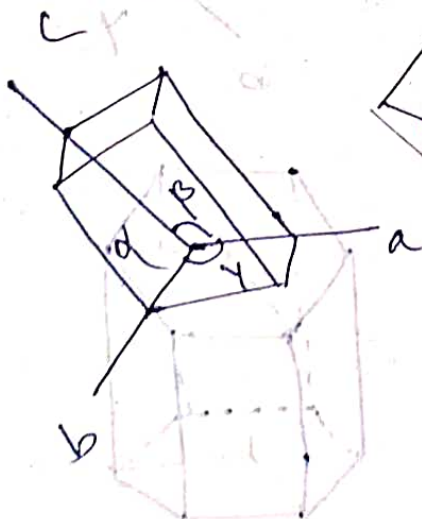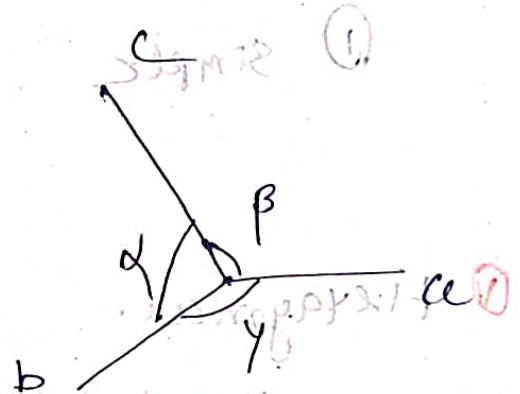

An ideally perfect crystal is one which has the same unit cell and contains the same lattice points through the crystal.


The term imperfection/defect is generally used to describe any deviation of the ideally perfect crystal from the periodic arrangement of its constituents.

Point Defects -

Point defects are the irregularities or deviations from ideal arrangement around a point or an atom in a crystalline substance.

→ VACANCY DEFECT


- Atom missing from an atomic site.
- Occur due to imperfect packing during crystallisation.
- This results in decrease in density of the substance.
- Number of vacancy defects depend on temp.

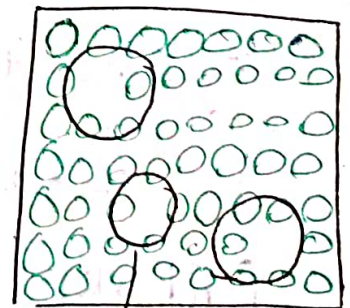

missing
atom

Interstitials Defect


- Addition of an extra atom within a crystal structure.
- This defect increases the density of the substance.
- Causes atomic distortion.
- vacancy and interstitially are inverse phenomena.

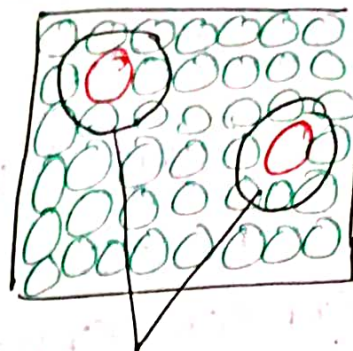

Interstitial atoms.

→ SCHOTTKY DEFECT

- Pair of anion and cation vacancies.
- In order to maintain electrical neutrality, the number of missing cations and anions are equal.

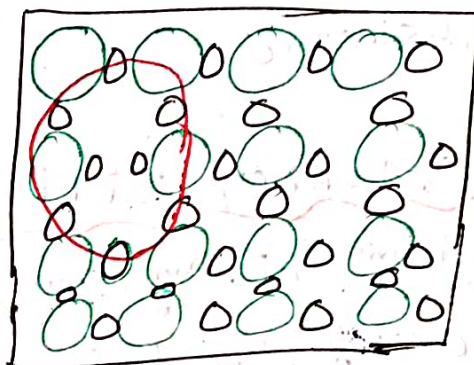


- It also decreases the density of crystal.
- Eg = Alkali halides such as NaCl, KF etc.

FRENKEL DEFECTS

- cation being smaller get displaced to interstitial voids.
- combination of vacancy and interstitial atom.

- No change in the density.

• Eg - AgI, CaF_2

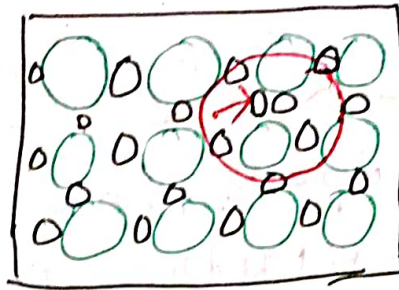

Line Defects



Line defects are the irregularities or deviations from ideal arrangement in entire rows of lattice points.

- Interatomic bonds significantly distorted in immediate vicinity is dislocation line.
- Dislocation affects the mechanical properties.

EDGE DISLOCATION -


An extra portion of a plane of atoms, or ~~half~~ half-plane the edge of which terminates within the crystal.

Edge dislocation line

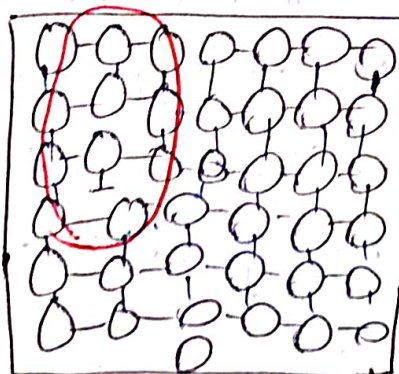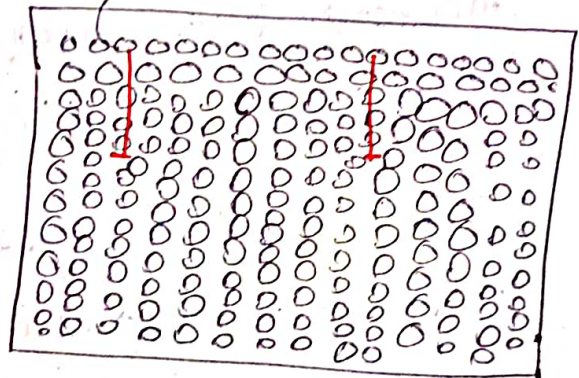

Screw dislocation.

- The upper front portion in the following figure has been sheared by one atomic distance to the right relative to lower front portion.

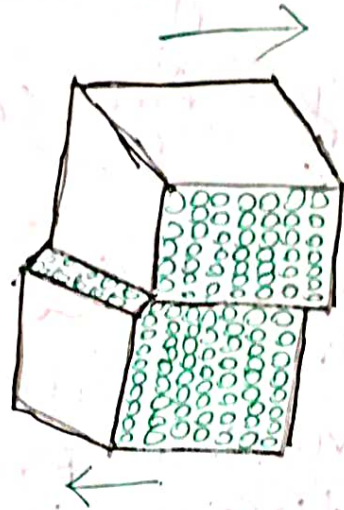

- The screw for such defect is derived from the fact that lattice planes of the crystal spiral the dislocation line.

* Effect of imperfection on material properties.

It affects the characteristics like mechanical strength, electrical properties and chemical reaction.


- Imperfections ~~are~~ account for crystal growth, diffusion mechanisms, annealing and precipitation. Besides this, other metallurgical phenomena, such as oxidation, corrosion, yield strength, creep, fatigue and fractures are governed by imperfections.

Slip -

Slip is the prominent mechanism of plastic deformation in metals.


It involves sliding of blocks of crystal over one other along definite crystallographic planes, called slip planes.

- It is analogous to a deck of cards when it is pushed from one end. Slip occurs when shear stress applied exceeds a critical value.

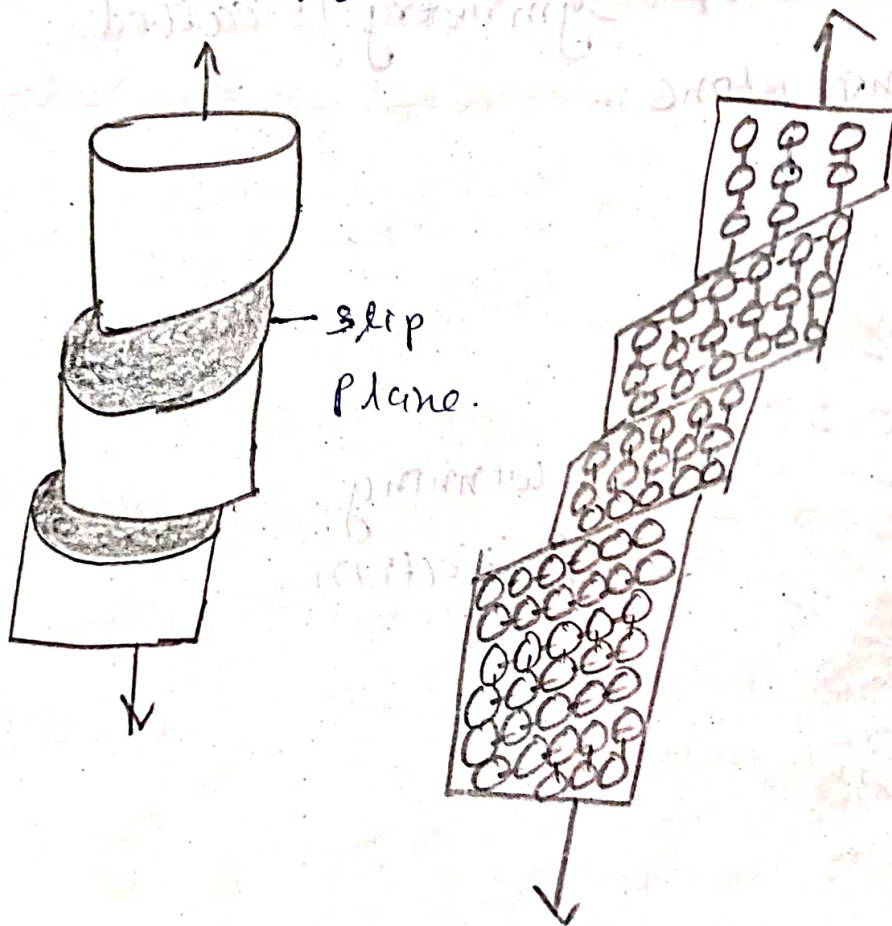

Twinning -

- Portion of crystal takes up an orientation that is related to the orientation of the rest of the untwined lattice in a definite symmetrical way.
- The twinned portion of the crystal is a mirror image of the parent crystal.
- The plane of symmetry is called twinning plane.

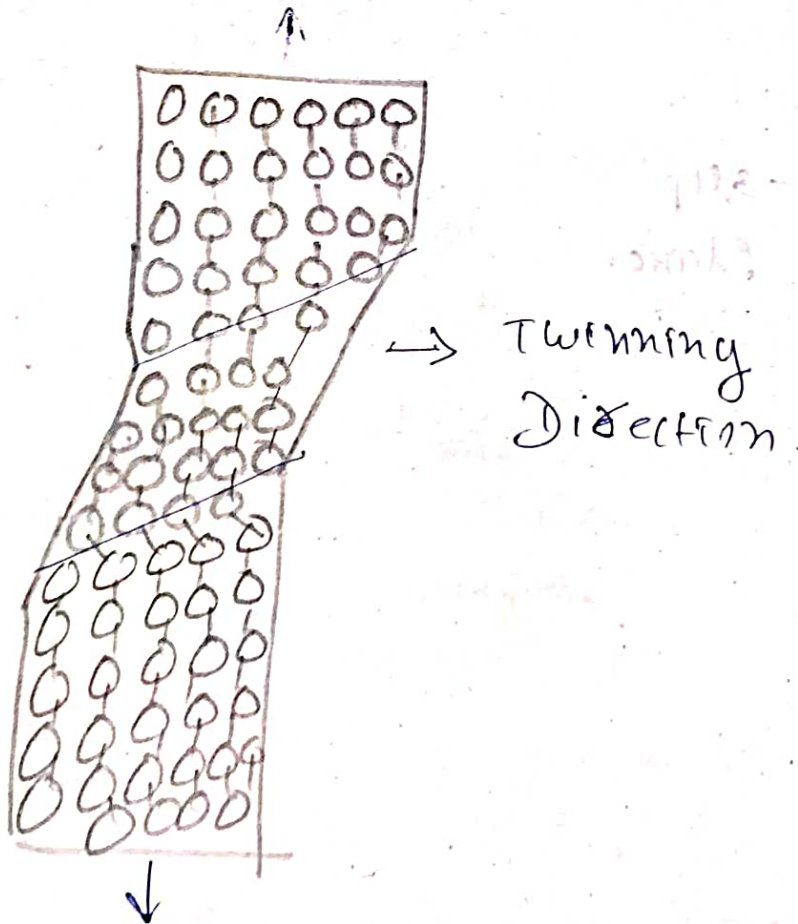

Effect of deformation on metal properties.

The mechanical properties ~~are~~ affected by deformation (plastic deformation).

The deformation process like rolling, forging, extrusion, drawing strain hardening takes place, so hardness changes.

Hardness increases with deformation.

The hardness of a metal increases with deformation.

Strain hardening is the process of increasing the strength of a metal by plastic deformation.

The process of strain hardening is also known as work hardening.

The strain hardening process is a result of the formation of dislocations.

The dislocations are defects in the crystal structure of the metal.

The dislocations are formed during the process of plastic deformation.

The dislocations are formed by the movement of atoms in the crystal structure.

The dislocations are formed by the movement of atoms in the crystal structure.


The dislocations are formed by the movement of atoms in the crystal structure.

HEAT TREATMENT

Heating a material to a temperature holding it at that temp. for a period of time followed by cooling at specified rate is called heat treatment.

Heating \rightarrow Holding — cooling

- Heat treatment process is a series of operations involving the heating and cooling of metals in the solid state.
- Its purpose is to change a mechanical property or combination of mechanical properties so that the metal will be more useful, serviceable, and safe for definite purpose.

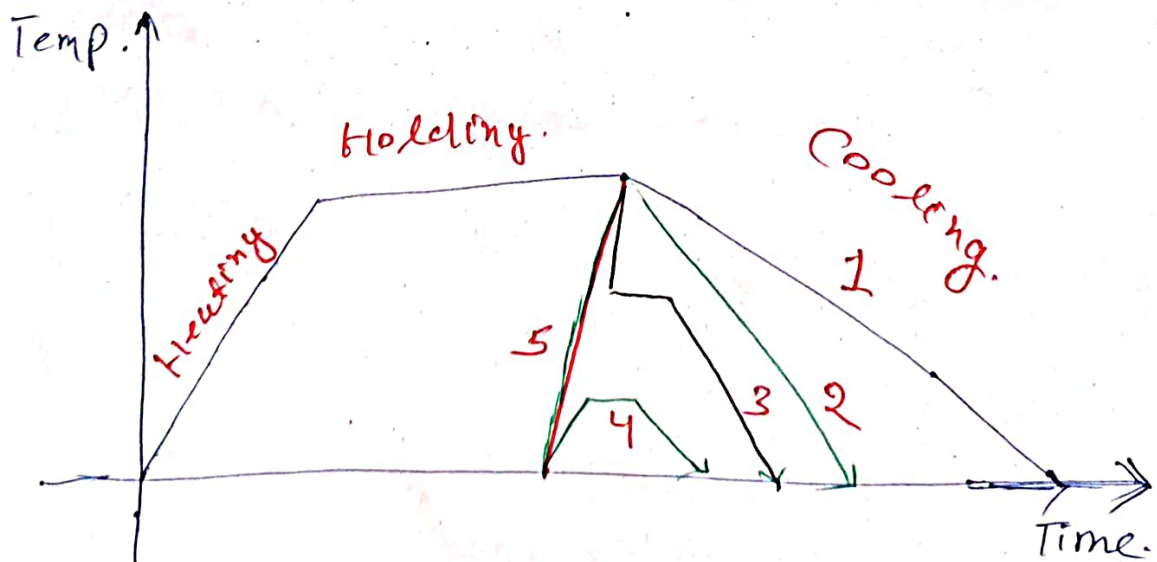

(Time & Temp more impt.)

1 - Annealing - Slow cooling - coarse pearlite.

2 - Normalizing - Faster cooling. - Fine Pearlite.
(Air cooling)

3 - Austempering - ~~cool~~
cool it very fast - Bainite.
but, then hold it
at a certain temp.

4 - Tempering - cooling very fast - Tempered
then reheat, then martensite
& cool it again

5 - Quenching - very fast cooling. - martensite.
(Hardening)
(put into
water/oil)

* Annealing -

It is the process for softening materials or to bring about required changes in properties such as machinability, mechanical or electrical properties.

- The annealing process consists of heating the steel to or near the critical temp. to make it suitable for fabrication.

- [A material can be annealed by heating it to a specific temp. and then letting the material slowly cool to ~~room~~ room temp. in an oven.]

(Critical temp - temp. at which crystalline phase change occurs)

- Normalizing -

It differs from annealing in that the metal is heated to a higher temp. and then removed from the furnace for air cooling.

- The purpose of normalizing is to remove the internal stresses induced by heat treating, welding, casting, forging, forming or machining.

NOTE -

annealing - nucleation low and growth rate is high - so it gives coarse pearlite.

normalizing - nucleation high and growth rate is low. so it gives fine pearlite.


Austempering -

When a ~~qu~~ austenite is quenched below the nose of the C curve but above M_s and then that austenite is allowed to transform.

→ Cool it very fast → ~~hold~~ hold for some time → then Re cool the material.

• It used for improve the mechanical properties.

Tempering -

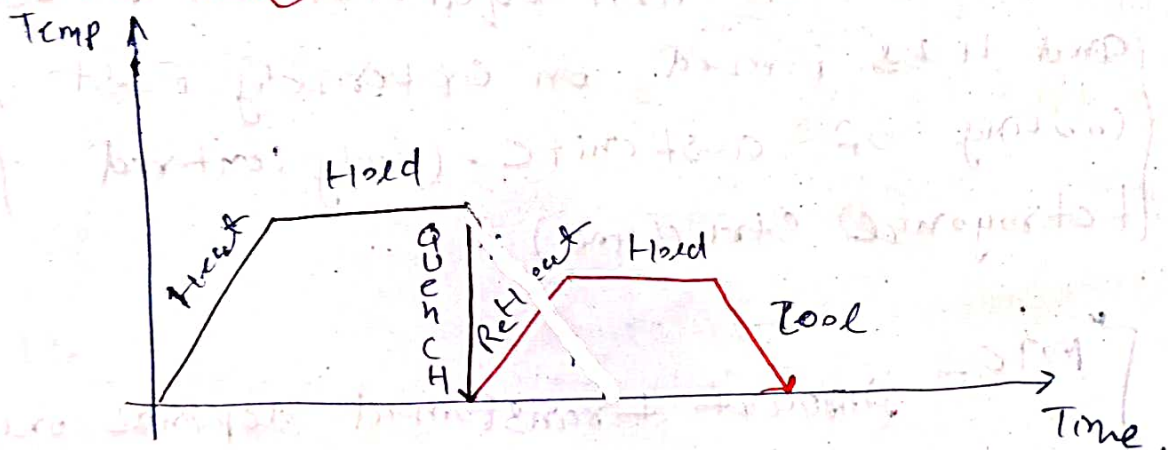

→ In the process Heat → Hold → Quench → Reheat (below the eutectoid temp.) - Hold → Cool.

• It Reduce the brittleness of ~~metal~~ steel.

Quenching -

→ In this process cool by it rapidly to put it in the oil and water.

- It is done to increase the strength and wear properties one of the pre-Requisites Requisites for hardening is sufficient carbon and alloy content.

- In this process we get martensite

{ Martensite - non equilibrium phase and it is formed on extremely fast cooling of austenite. (Body centred tetragonal structure) }

Note - Amount transformed depends only on the upon temp and not on time

- No change in composition.

Surface Hardening -

- In order to possess considerable strength to withstand forces acting on them and to withstand wear on their surface,
- The parts must be made of tough materials and provided with a hard surface by introducing carbon or nitrogen into surface with core remaining soft.
- It provides us a hard and wear resistant surface, close tolerance in machining parts and tough-core combined with a higher fatigue limit and high mechanical properties in core.

Hardenability -

It is defined as property of a steel to be hardened by quenching and determined the depth and distribution of hardness ~~the~~ throughout a section obtained by quenching.

- - alloying elements -
- Carbon content
- Grain size of steel.

- The homogeneity of Steady Steel

• Note -

Ease of hardening a steel by formation of martensite on quenching (very fast cooling)

Ease = Slow Quenching Rate

Slower the Quenching Rate higher is hardenability

NON-FERROUS ALLOYS

Duralmin - It is the oldest alloy of Aluminium

Its composition is 3.5-4.5% copper

0.4-0.7% manganese.

0.4% silicon

0.4% - 2.7% magnesium.

0.5% iron.

AL - 1% (next)

- Its tensile strength increases from 1.55-1.86 ton/cm², yield point from 1.04-2.325 t/cm² and hardness from 65 brinell to 95 brinell.
- Used for highly stressed structural components. aircrafts and automobile parts (front axle, levers, connecting rods, spares)
- Also it is used for surgical and orthopedic work for non magnetic and other instrument parts.

γ-alloys - (nickel-containing AL Alloy)

- It is a high strength casting alloy which retains its strength and hardness at high temp.
- Its % of composition - 4% manganese, 2% nickel, 0.6% manganese. Rest of aluminium.

- Its ultimate strength is 2.12 tons/cm^2 but after casting after heat treatment show a strength of 3.1 tons/cm^2 .

- It is extensively used for pistons, cylinder heads and crank case of internal combustion engine.

Copper alloys -

* Copper aluminium alloys -

- AL gets hardened and strength by the addition of copper.

- It is used alloys for castings are those containing up to 12% copper and ultimate strength ranging from $1.12 - 4.185 \text{ t/cm}^2$.

- It is used for automobile piston, crank case, cylinder heads, connecting rods.

Copper-Tin

These bearing alloys containing greater proportion of tin with copper and antimony and known as white metals.

In this type having composition of 86% tin 10.5% antimony copper has tensile strength of 2.996 ton/cm^2 , elongation 7.1%. with brinell hardness of 33.3 and compressive yield point of 4.3.

- It is used in main bearings of motors & aero engines.

* - Babbitt

- It can be one of several alloys used as a bearing surface in plain bearing.
- Its composition is 82.3% tin, 3.9% copper 7.1% antimony.
- ~~• A cheaper babbitt metal base for bearings~~
- They are used as liners in bronze or steel backing and are prepared for higher speed, excellent embedability, conformability, ability to deform plastically used in IC engine, purpose bearings.

Phosphor bronze -

It is a member of the family of copper alloys. It is composed of copper that is alloyed with 0.5-11% of tin and 0.01-0.35% phosphorus, and may contain other elements to confer specific properties.

- It is used for springs, bolts, electrical switches, sliding parts -
- It is this alloy where Resistance to fatigue wear, and corrosion are required. (Corrosion Resistance)

BRASS -

It is an alloy made primarily of copper and zinc.

Composition - 36% zinc and 64% Cu

- Corrosion Resistance, low friction
- Used in musical instruments, electronic parts, wire, tools, machining parts -

Copper-nickel

In this alloy of copper that contains nickel and strengthening elements, such as iron and ~~more~~ manganese.

- Copper content typically varies from 60-90%.
- Despite ~~the~~ its high copper content, Cupronickel is silver in colour.

- It has ~~and~~ excellent resistance to seawater corrosion, low macrofouling rates, good fabricability.

~~Composition~~ - ~~10-15% Antimony~~

~~15% Cu,~~

~~20% Tin.~~

- It is used for - evaporator of turbine, pipes for nuclear and fossil fuel power plant.

- heat exchanger tubes, pumps, water boxes.

- Predominating element of Lead alloys, Zinc alloys and nickel alloys.

* Lead alloys -

The tin is replaced by lead base alloys and contains - 10-15% antimony, 15% Cu, 20% Tin and 60% lead.

- These alloys are cheaper than tin base alloys, but not strong and do not possess the load carrying capacity strength decreases with increasing in temp. An alloy containing 30% Lead, 15% antimony and 5% tin or 20% antimony generally used for long bearings with medium loads.

* Zinc alloys -

These alloys used in the form of tooling plate and easy and speed of fabrication.

Brasses - Alloys of Cu and Zn.

* Nickel alloys -

Nickel is one of the most important metals which used as pure metal and alloys with other metals.

- Nickel copper - nickel copper silicon alloy.
- Nickel copper tin with lead.
- Nickel Chromium - with iron or cobalt
- Nickel silicon -
- - nickel manganese, nickel aluminium.

Low alloy materials like P-91, P-22 for power plants and other high temp services, high alloy materials like stainless steel grades of duplex, super duplex materials.

Low alloy materials -

which possess slowly cooled microstructure, similar to those of plain carbon steel on the same condition namely pearlite, pearlite plus ferrite. These low alloy known as pearlite steel.

High alloy steel.

which possess slowly cooled microstructure, consisting either of martensite, austenite or ferrite plus carbide particles, it is more than 8% in the case of steels.

Bearing material

Introduction -

when a lubricant film can't completely separate the moving parts of a bearing friction and wear increase.

- The Resulting friction heat combined with high pressure promotes localized welding of the two rubbing surface. These welded contact points break apart with relative motion and metal is pulled from one or both surface decreasing the life of the bearing.

- Steel or cast iron, are used as bearings. bec they easily weld together.

Classification of Bearing material.

- 1 - Tin Based Babbitt
- 2 - lead based Babbitt
- 3 - Cadmium Based bearing material.
- 4 - Copper based Bearing material.

→ Composition & uses of different type of bearing material.

Name	composition:	uses
Tin Based Babbitt	85% Sn, 10% Sb. 5% Cu.	High speed bearing bushes in steam and gas turbine, electric motor, blowers, pump etc.
Lead Based Babbitt	85% Pb 12% Sb 3% Sn	Railway wagon bearing.
Cadmium Based	95cd - 5% ag & small amount of iridium	medium loaded bearing subjected to high temp.
Copper Based	80% Cu 10% Pb 10% Sn	Heavy duty bearing

Properties of Bearing material

- It should have enough compressive and fatigue strength to possess adequate load carrying capacity.
- It should have good plasticity for small variations in alignment & fittings.

- good wear ~~Resist~~ Resistance to maintain a specified fit.
- Low coefficient to avoid excessive heating.
- Should resist vibration.
- High thermal conductivity.

Engineering material.

Polymer -

The plastic is an organic substance and it consists of natural or synthetic binders, or resins with or without moulding compounds -

The plastic is manufactured by the polymerization.

monomer -

The simplest substance consisting of one primary chemical are known as the monomers.

Polymerization -

monomers are to be combined to form polymers by the process known as polymerization.

Polymeric material consists of a large number of these long chain molecules.



monomer
ethylene C_2H_2



Polymer polyethylene.
 $(\text{C}_2\text{H}_4)_n$


The properties such as strength, rigidity and elasticity are considerably improved by the polymerization and it further leads to the manufacture of plastics as an economy way.

Classification of plastic.


- 1 - Behaviour with respect to heating.
- 2 - Structure and
- 3 - Physical and chemical properties.

NOTE -

Composition of plastic.

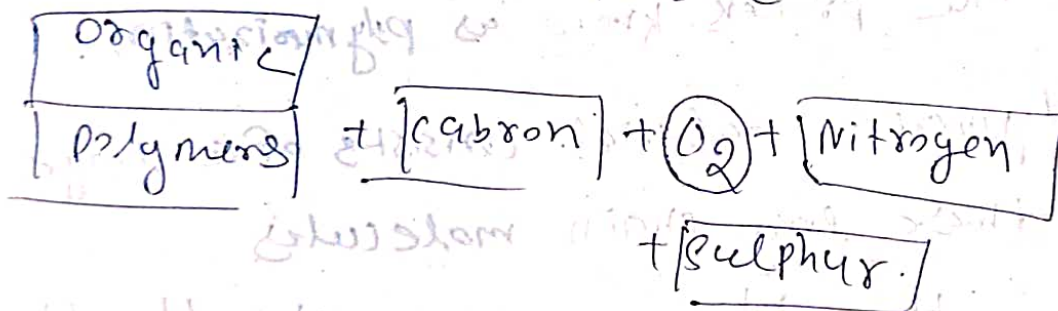

* Behaviour with respect to heating.

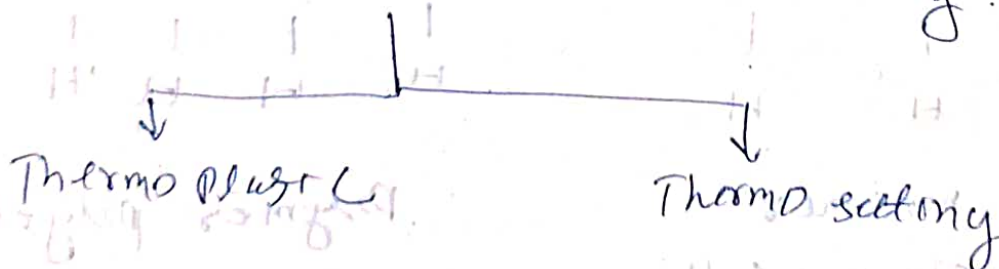

* Structure

```
graph TD
    A[Structure] --> B[Homogeneous]
    A --> C[Heterogeneous]
```

* Physical and Chemical properties -

Rigid plastic ↔ Semi-Rigid plastic

Soft plastic ↔ Elastomers

Thermo plastic -

The thermo plastic group is the general term applied to the plastics which becomes soft when ~~be~~ heated and hard when cooled.

- It can be cooled and heated several times.

- It can be Recycled.

- When it is heated, they melt to a liquid.

They also freeze to a glassy state when cooled enough.

Note - Heat → liquify.

Cool → solidify -

Properties -

- It allow plastic deformation when it is heated

- They are brittle and glossy.

- Good resistance to creep.

Application -

- used for electronic application.
(wire cover, switch board)
- electrical machines, tubes covered.
- electrical insulation, handles of tools.
- making ropes, belts, pipes etc.

Thermo setting plastics.

The thermo setting plastics is the general term applied to the plastics which become rigid when moulded at suitable pressure and temp.

- when the temp. range 122°C to 172°C they set permanently and further application of heat does not alter their form or soften them.
- But at the temp. of about 343°C the charring occurs. This charring is a peculiar characteristic of the organic substances.

Processing - $A + B = C$

(\otimes mix 2 components \rightarrow (cure.)

Properties -

These are soluble in alcohol and certain organic solvents, when they are in thermo-plastic stage.

• These are durable, strong & hard.

Used / application -

• Electronic chips -

• Fibre-reinforced composites.

• Dental fillings -

• ~~mechanical~~ ~~engine~~

• Engineering application plastic.

• Spectacle lenses.

* Properties of elastomers -

These plastic are soft and elastic materials with low modulus of elasticity. They deform considerably under load at room temp. and return to their original shape, when the load is released, ~~the~~ the extensions can range up to ten times their original dimensions.

Composites and ceramics -

Classification -

The composite materials are shortened as composites. They are formed by combining two or more different materials to make better use of their virtues and by minimizing their deficiencies.

- Each material retains its physical or chemical properties separate and distinct within the finished product.

1- Strong load carrying material known as Reinforcement

2- weaker material known as matrix.

1 Reinforcing fibres -

- I - It provides strength and rigidity.
- II - It helps to support structural load.
- III - It is divided into 3 types -

(I) - glass fibres.

II - carbon fibres.

III - Aramid fibres.

- Glass fibres are the heaviest having greatest flexibility and the lowest cost.
- Aramid has moderate stiffness and cost.
- Carbon moderate to high in cost, slightly heavier than aramid but lighter than glass fibres.
- Carbon is the strongest.

2 - matrix -

- I - It works as a binder.
- II - It maintains the position and orientation of the Reinforcement.
- III - It balances the load betⁿ the Reinforcement.
- IV - It protects the reinforcement degradation.
- V - It provides shape ~~reinforcement~~ and form to the structure.

Composites natural -

Wood - cellulose fibres plus polysaccharide.

Bones, teeth and mollusc shells.

= hard ceramic + organic polymer.

man made composites -

1. mud + straw.

2. Bricks made up straw + mud.

3. Plywood.

4. Concrete, plastic, MMC, CMC.

* Classification and use of ceramics -

A ceramic material is an inorganic, non metallic, often crystalline oxide, nitride or carbide material.

i - Clay products

ii - Refractories -

iii - Glass -

Clay products -

The products which are used tiles, terracotta, porcelain, bricks, stoneware's & earthen wares.

1 - Common tile 10 - Encaustic tiles.

Common tile

- 6 - Alababad tiles, Corrugated tiles, Flat tiles
- 10 - the tile able to Resist high temp.

Refractories

It is a material that is Resistant to decomposition by heat, pressure, or chemical attack and Retains strength and form at high temp.

- Refractories are Inorganic, non metallic porous and heterogeneous.

- Application -

used in furnaces, kilns, incinerators, and reactors,

Glass -

These ceramics have an amorphous phase and one or more crystalline phase and are produced by a so-called controlled crystallization, in contrast to a spontaneous crystallization, which is usually not wanted in glass manufacturing.

- glass ceramics have interesting properties like zero porosity, high strength, toughness,
- low or even negative thermal expansion, high temp. stability
- use for electrical insulators, architectural cladding, heat exchangers and regenerators.